Tel.: +43 664 88512370 E-Mail: office@wal-austria.at











### Schneiden - Spannen - Schweißen in Perfektion



The AD 2000 iQ's technology delivers superior and measurable performance, ensuring airflow and filtration is maintained even when particulates start to build up. It's thanks to the vacuum/pressure which is three times greater than that of its predecessor, the AD 2000. This makes it suitable for the most demanding and complex installations, so you can rely on extended filter life, together with effective removal of fumes and particulates.

It's user friendly too, with a design that makes easy work of filter changes. And the easy to read and access controls display panel is conveniently located on top of the unit. The iQ Operating System is Patent-protected and has received global acclaim for its ability to maximise manufacturing performance and continuity of production.

The AD 2000 iQ's design also permits greater flexibility of different exhaust installations. Different exhaust configurations allow recirculation via the rear panel or externally vented hose connection systems.

**OPTIONAL FEATURES:** 

interface

fail signal

Remote stop / start

Filter change / System

VOC gas sensor (Volatile


Organic Compound)

On-board compressor

# STANDARD FEATURES:

- iQ Operating System
- 2 x DeepPleat DUO pre filters
- Reverse Flow Air technology
- Combined HFPA/Gas filter incorporating ACF technology
- Blowers with high airflow and vacuum levels
- High contrast display
- Real time airflow reading
- Filter status warnings
- Remote data diagnostics via USB
- Independent filter condition monitoring
- Long life filters with low replacement costs
- 'Run safe' operation (filters must be installed correctly for the unit to operate)

The AD 2000 iQ laser fume extraction unit packs a heavyweight punch with unsurpassed filter capacity and high performance.

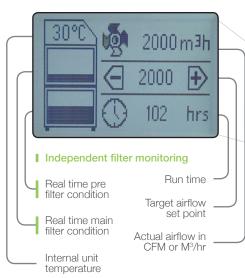












Patented Technology - Patent No: GB2 499 812



UNIT - PART NUMBERS				
Model	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitor
AD 2000 iQ Powder Coated	L5244	A2001	A2002	A2003

REPLACEMENT FILTERS - PART NUMBERS				
Model	Twin Pack DeepPleat DUO Pre Filters	Twin Pack Combined HEPA/Gas Filters		
AD 2000 iQ	A1030336	A1030335		

TECHNICAL DATA	
	170 - 440V
Dimensions (HxWxD)	1277 x 1318 x 1013mm (50.3 x 51.9 x 39.9")
Cabinet Construction	Powder coated mild steel
Airflow / Pressure	2200m³/hr / 96mBar (1295cfm / 96mBar)
Electrical Data	(EU) 415V / 3Ph / 50Hz / 6.6kw / 16A / L1, L2, L3 14A - N 28A (USA) 208V / 3Ph / 60Hz / 6.6kw / 20A / L1, L2, L3 24A - N 35A
Noise Level	< 62dBA*
Weight	340kgs (750lbs)


<sup>\*</sup> At typical operating speed.

2 X DEEPPLEAT DUO PRE FILTER SPECIFICATIONS		
Surface Media Area	30m² approx (60m²)	
Filter Media	Glass Fibre	
Filter Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec mild steel	
Filter Efficiency	F8 (95% @ 0.9 microns)	

2 X COMBINED HEPA/GAS FILTER SPECIFICATIONS		
Surface Media Area	7.5m <sup>2</sup> approx (15m <sup>2</sup> )	
HEPA Filter Media	Glass Fibre	
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec Mild Steel	
Treated Activated Carbon	34kgs (68kgs)	
Filter Efficiency	99.997% @ 0.3 microns	

Other nose kits and litters are available. All the above units are littled with our standard litter combinations. For specific applications please call us for details. Replacement filters should always be ordered using the part number on the filters inside your extractor to ensure the correct filter is ordered. Datasheet correct at time of print.


#### AIRFLOW THROUGH FILTERS

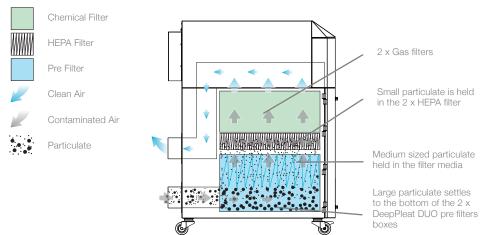

## TECHNICAL SPECIFICATION



- 1 iQ Display
- 2 Standby button3 Signal / Interface Cable
- 4 Power Cable
- 5 Locking Castors
- 6 Door Hinges
- Hose Inlet Connections
  125mm
- 8 Optional Exhaust Outlet Connections - 125mm
- 9 Removable front panel
- 10 Door Latches11 On / Off Switch









Tel: +44 (0) 1202 699 444 Fax: +44 (0) 1202 699 446 Email: sales@bofa.co.uk Web: www.bofa.co.uk























